

TECHNICAL DATA SHEET

LED TUBE T8 600mm GLASS



Product Specifications:

• Model:	Led Tube T8 600mm Glass
• Typical use:	Lighting

Specifications:

• Power consumption	8 W	
• Luminous flux	800 lm	
• Color temperature (CCT)	NW 4000°K	CW 6500°K
• Color Render index (CRI)	>80	
• Luminous efficiency	100 lm/W	
• Power Factor	>0.9	

- Lifetime:

• Appliance life time	30000 h (L70)
-----------------------	-----------------


TECHNICAL DATA SHEET

LED TUBE T8 600mm GLASS


Specifications:

• Input Voltage	220-240V AC (50/60Hz)
• Weight	140g
• Beam Angle	220°
• Body material	PC + Aluminum + Glass (diffuser)
• IP protection rating	IP20
• Dimmable function	NO
• Replacing Power Supply	NO
• Replacing LED	NO
• Operating Temperature	- 20°C + 45°C
• Storage Temperature	-40°C + 80°C
• Blue Light Risk Group	EXEMPT

Connections:

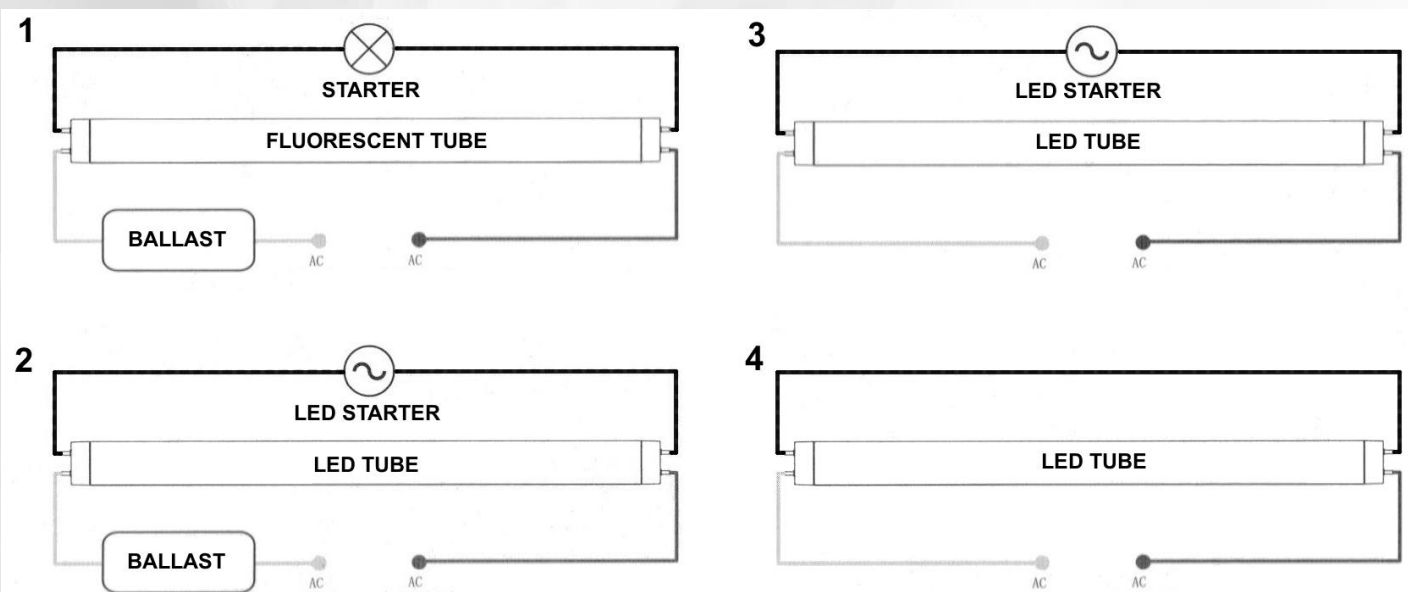

- 1- Fluorescent tube
- 2- Retrofit
- 3- No ballast
- 4- New ring



The **STARTER LED** has only inside an electrical connection between the two pins.

Don't use with electronic ballast

TECHNICAL DATA SHEET

LED TUBE T8 1200mm GLASS



Product Specifications:

• Model:	Led Tube T8 1200mm Glass
• Typical use:	Lighting

Specifications:

• Power consumption	16 W	
• Luminous flux	1600 lm	
• Color temperature (CCT)	NW 4000°K	CW 6500°K
• Color Render index (CRI)	>80	
• Luminous efficiency	100 lm/W	
• Power Factor	>0.9	

- Lifetime:

• Appliance life time	30000 h (L70)
-----------------------	-----------------


TECHNICAL DATA SHEET

LED TUBE T8 1200mm GLASS


Specifications:

• Input Voltage	220-240V AC (50/60Hz)
• Weight	140g
• Beam Angle	220°
• Body material	PC + Aluminum + Glass (diffuser)
• IP protection rating	IP20
• Dimmable function	NO
• Replacing Power Supply	NO
• Replacing LED	NO
• Operating Temperature	- 20°C + 45°C
• Storage Temperature	-40°C + 80°C
• Blue Light Risk Group	EXEMPT

Connections:

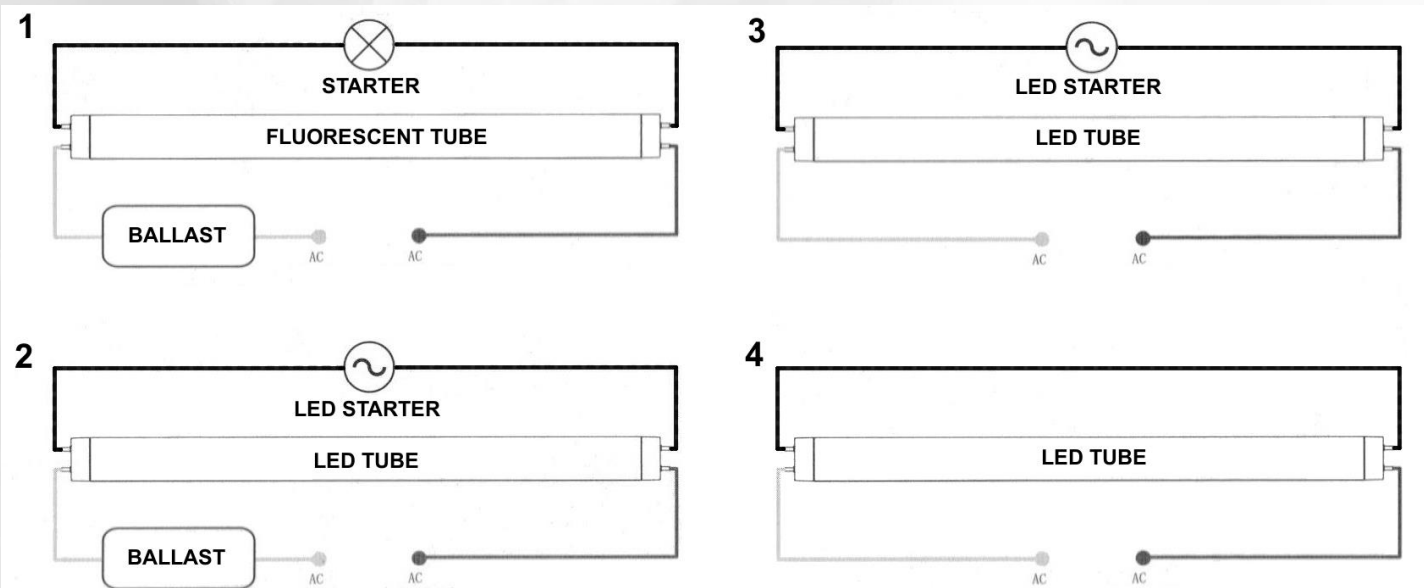

- 1- Fluorescent tube
- 2- Retrofit
- 3- No ballast
- 4- New ring



The **STARTER LED** has only inside an electrical connection between the two pins.

Don't use with electronic ballast

TECHNICAL DATA SHEET

LED TUBE T8 1500mm GLASS



Product Specifications:

• Model:	Led Tube T8 1500mm Glass
• Typical use:	Lighting

Specifications:

• Power consumption	20 W	
• Luminous flux	2000 lm	
• Color temperature (CCT)	NW 4000°K	CW 6500°K
• Color Render index (CRI)	>80	
• Luminous efficiency	100 lm/W	
• Power Factor	>0.9	

- Lifetime:

• Appliance life time	30000 h (L70)
-----------------------	-----------------


TECHNICAL DATA SHEET

LED TUBE T8 1500mm GLASS


Specifications:

• Input Voltage	220-240V AC (50/60Hz)
• Weight	140g
• Beam Angle	220°
• Body material	PC + Aluminum + Glass (diffuser)
• IP protection rating	IP20
• Dimmable function	NO
• Replacing Power Supply	NO
• Replacing LED	NO
• Operating Temperature	- 20°C + 45°C
• Storage Temperature	-40°C + 80°C
• Blue Light Risk Group	EXEMPT

Connections:

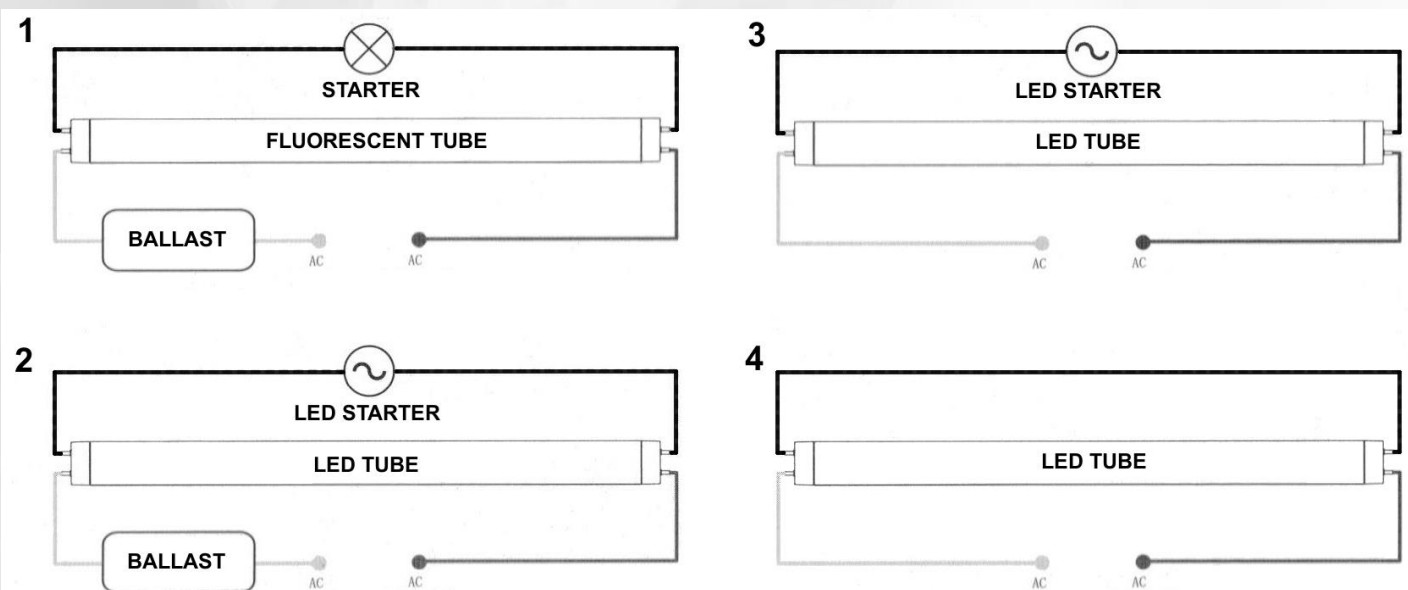

- 1- Fluorescent tube
- 2- Retrofit
- 3- No ballast
- 4- New ring



The **STARTER LED** has only inside an electrical connection between the two pins.

Don't use with electronic ballast